

450 Watt EVD Series DC/DC CONVERTER



Description:

The EVD450 Watt series is a ruggedized series of DC-DC converters suitable for electric vehicle, marine, industrial and other applications which draw power from a bank of batteries or other high voltage DC power source. It is used to supply power to accessories, lights, instruments, etc.

- Fully Isolated
- High Reliability
- High Efficiency
- Withstand Output Load Surges
- Over Voltage Protection
- Short Circuit Protection
- Over Temperature Protection
- Input Reverse Polarity Protection
- Enable/Remote On/Off
- Very Low Quiescent Current
- IP66 Enclosure
- RoHS Compliant
- 2 Year Warranty



Model Number	Input Voltage Range	Input Current (Max)	Output Voltage (VDC)	Output Current (Max)	Efficiency
EVD-48-S-450-14	30 – 65 VDC	20A	14.2	32A	90%
EVD-72-S-450-13	60 – 95 VDC	10A	13.5	33A	90%
EVD-102-S-450-13	80 – 126 VDC	7A	13.5	33A	90%

450 Watt EVD Series DC/DC CONVERTER



Specifications:

INPUT PARAMETERS – 48V				
	Min	Typ	Max	Units
Input Voltage Range	30	48	65	VDC
Input Current			20	A
Reflected Ripple Current DC to 200 kHz			0.4	A p-p
Quiescent Current		8	12	μA
Input Over Voltage (Max)	77V continuously 100V for 1 second			
Input Filter	Internal Capacitor			

INPUT PARAMETERS – 72V				
	Min	Typ	Max	Units
Input Voltage Range	60	72	95	VDC
Input Current			10	A
Reflected Ripple Current DC to 200 kHz			0.4	A p-p
Quiescent Current		8	12	μA
Input Over Voltage (Max)	107V continuously 143V for 1 second			
Input Filter	Internal Capacitor			

INPUT PARAMETERS – 102V				
	Min	Typ	Max	Units
Input Voltage Range	80	102	126	VDC
Input Current			7	A
Reflected Ripple Current DC to 200 kHz			0.4	A p-p
Quiescent Current		8	12	μA
Input Over Voltage (Max)	150V continuously 200V for 1 second			
Input Filter	Internal Capacitor			

450 Watt EVD Series DC/DC CONVERTER




OUTPUT PARAMETERS				
	Min	Typ	Max	Units
Output Voltage Accuracy		±1.0	±3.0	%
Load Regulation I _o = 20% to 100%			5	%
Peak Surge Current (5 mSec)			50	A
Line Regulation For Vin Chage of 10%			±0.02	%
Ripple & Noise (20MHz) (3)		140	250	mV p-p
Temperature Coefficient			0.03	% / °C
Over Voltage Protection	16V Continuously, 18V for 1 sec			
Over Current Protection	Hiccup Mode			
Short Circuit Protection	Hiccup Mode			

REMOTE ON/OFF	
Converter On	Enable (ON/OFF) connected to +Vin. *Activates from 3 to 6 VDC, referenced to -Vin up to +Vin MAX.

Derating Curve:

72V Model Only

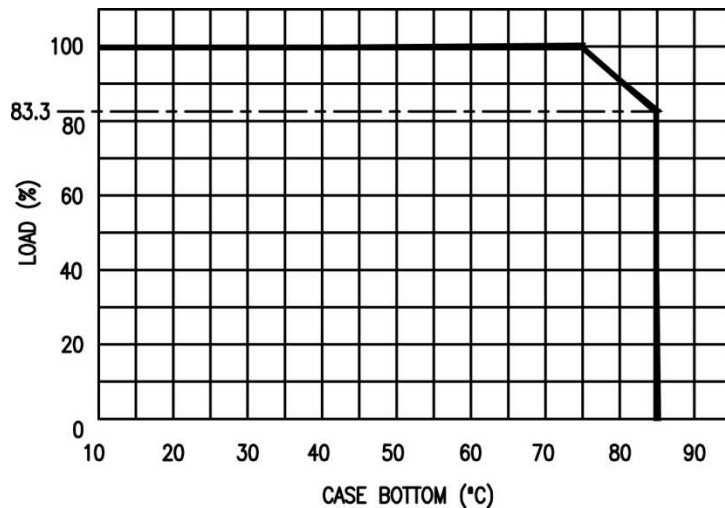

450 Watt EVD Series DC/DC CONVERTER



GENERAL SPECIFICATIONS				
	Min	Typ	Max	Units
Capacitive Load			10000	μF
Isolation Voltages (60 Seconds)				
Input to Case	2250			VDC
Input to Output	2250			
Output to Case	500			
Isolation Resistance (500 VDC)	10			Mohms
Isolation Capacitance		3300		pF
PWM Frequency		>50		kHz
Operating Temperature (Ambient)	-40		+85	°C
Storage Temperature	-40		+85	°C
Baseplate Temperature (Maximum)			+100	°C
Humidity	0		90	%
MTBF Mil-HDBK-217F @ 25°C Ground Benign	150			kHours
Cooling	Baseplate temperature cannot exceed specified maximum, under all operating conditions in application			
Case Size	7.48 x 2.99 x 1.71 inches 190.0 x 76.0 x 43.5 mm			
Case Material	Metal			
Weight	1.25 kg			
Agency Approvals:	Designed to meet UL583			

EMC REQUIREMENTS (DESIGNED TO MEET)	
EMC EMISSIONS:	EN12895, EN55022
EMC IMMUNITY	EN12895
ESD:	EN12895 (±4KV CONTACT, ±15KV AIR)


Notes:

- (1) All specifications are stated at 25°C ambient and typical input line.
- (2) Ingress protection to IP66, excluding connectors.
- (3) Output terminated with 1μF ceramic capacitor and 15μF tantalum capacitor.
- (4) Vibration to withstand 6G in x, y, and z axis from 0 to 200 Hz for 1 minute.
- (5) Remote ON/OFF to be referenced to –Input Terminal
- (6) Specification is subject to change without notice.
- (7) See Green Watt Power website for RoHS statement. www.greenwattpower.com/pdf/rohs.pdf

450 Watt EVD Series DC/DC CONVERTER



Case Specifications:

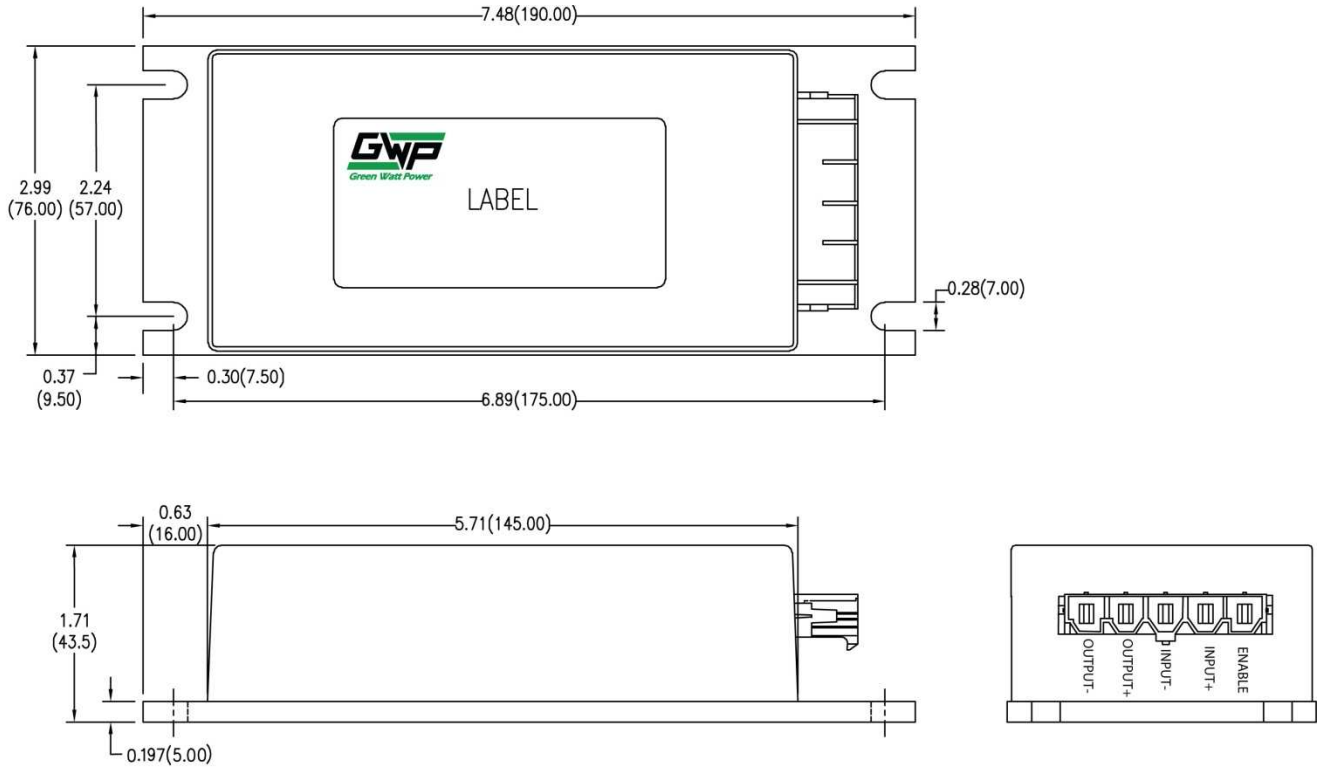

All dimensions are inches (mm)
Tolerance ± 0.01 (0.254mm) unless otherwise noted.

*Notes:

1. Connector is Molex 42820 Series. Mating connector is Molex 42816-0512 with terminal pins 42815-0114.
2. Output is enabled when enable wire 3 to 6VDC or higher referenced to the $-V_{in}$ wire. If enable feature is not required enable wire should be connected to $+V_{in}$ wire.