

# 40 Watt Series

## CONSTANT CURRENT LED DRIVER



**Green Watt Power**

Division of Calnex Mfg. Co. Inc.

[www.greenwattpower.com](http://www.greenwattpower.com)

925-687-4411 / 800-542-3355

email: [sales@greenwattpower.com](mailto:sales@greenwattpower.com)



### Description

The GLC 40 Watt series provides a constant current power supply for use in LED applications. Provides a maximum of 40 watts continuous output with air convection.

- Universal AC Input / Full Range
- 100-277 VAC Input for North America
- CSA/UL Approved
- CE Approved
- High Reliability
- Efficiency up to 88%
- Over Voltage Protection
- Short Circuit Protection
- Over Current Protection
- Over Temperature Protection
- Waterproof IP67
- RoHS Compliant
- 5 Year Warranty



### Model Selection

Model Number	Output Current	Current Range	Voltage Range
GLC-0900-40	900 mA	855 - 945 mA	30 - 48 V
GLC-01100-40	1.1 A	1.05 - 1.16 A	20 - 36 V
GLC-01200-40	1.2 A	1.14 - 1.26 A	20 - 36 V
GLC-01400-40	1.4 A	1.33 - 1.47 A	20 - 30 V
GLC-01800-40	1.8 A	1.71 - 1.89 A	15 - 24 V
GLC-02200-40	2.2 A	2.09 - 2.31 A	12 - 18 V
GLC-02400-40	2.4 A	2.28 - 2.52 A	12 - 18 V

# 40 Watt Series CONSTANT CURRENT LED DRIVER



## Specifications

Input Parameters			
Input Voltage Range*	MIN	100	VAC
*Designed to optimum performance at 110 and 220 nominal lines	TYP	230	
	MAX	277	
Input Frequency	TYP	47 - 63	Hz
Power Factor			
110 VAC Input, Full Load		0.95	
277 VAC Input, Full Load		0.90	
Input Current			
110 VAC, Full Load	MAX	0.9	A
220 VAC, Full Load		0.45	
Inrush Current			
220 VAC/60Hz, Full Load Cold Start	MAX	30	A

Case Size	6.42" x 1.73" x 1.25" 163mm x 44mm x 31.75mm
Unit Weight	0.4Kg
Agency Approval Depending on Model	CSA File No. 256302 UL8750, 1st ed. UL1310, 5th ed. Class 2 CSA C22.2 No. 223-M91 CAN/CSA-C22.2 No. 60950-01-07, ANSI/UL 60950-1 2nd ed. CE Marked


Output Parameters			
Noise & Ripple	MAX	5	%
Total Harmonic Distortion (THD)	MAX	<20	%
Setup Time			
220VAC Input - Full Load	MAX	2	s
Rise Time (See Note 4)	MAX	200	ms
Overshoot and Undershoot Response (Power On/Off)	MAX	±10	%

General Specifications			
Short Circuit Protection	Recovers automatically after fault condition is removed		
Withstand Voltage			
Test Method: I/P - O/P	3750 VAC or 5303 VDC 1 MIN. ≤ 10 mA		
Test Method: I/P - FG	1875 VAC or 2651 VDC 1 MIN. ≤ 10 mA		
Test Method: O/P - FG	500 VAC or 707 VDC 1 MIN. ≤ 10 mA		
Withstand Impedance	500 VDC 10MΩ/min (at room temperature)		
Test Method: I/P - O/P			
Grounded Impedance	25A/3 SEC		
MTBF: (MIL-HDBK-217F 25°C)	≥ 200,000	Hours	
Temperature - Operating	MIN	-35	°C
	TYP	25	
	MAX	70	
Temperature - Storage	MIN	-40	°C
	TYP	25	
	MAX	85	

### Notes:

- (1) Specifications are subject to change without notice.
- (2) Output Voltage will auto-adjust within the voltage range to provide the constant current as specified.
- (3) DC Output Ripple & Noise Test Conditions: Oscilloscope should be limited at 20 MHz bandwidth. At output terminals with parallel 0.1 μF ceramic and 22 μF electrolytic capacitors.
- (4) Rise Time - is change from 10% to 90% of rated load. The output voltages shall rise from 10% to 90% of their output voltage.
- (5) See Green Watt Power website for RoHS statement. [www.greenwattpower.com/pdf/rohs.pdf](http://www.greenwattpower.com/pdf/rohs.pdf)


## Derating Curves

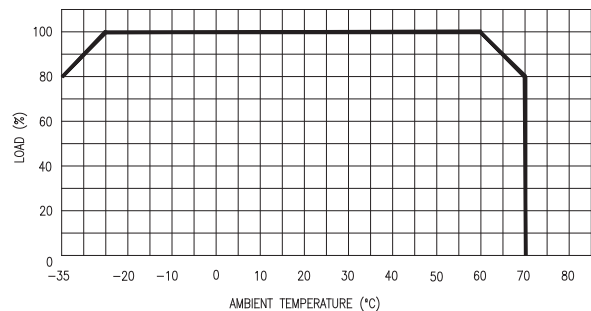

# 40 Watt Series CONSTANT CURRENT LED DRIVER



## Case Specifications

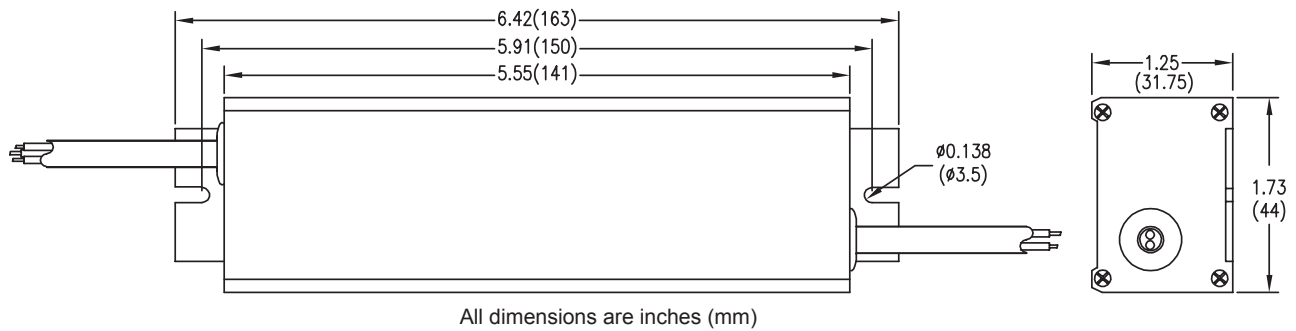

AC INPUT	DC OUTPUT
AC LINE - BLACK	+V OUT - WHITE
AC NEUTRAL - WHITE	- V OUT - BLACK
GND - GREEN	

Wire color may vary. See label for actual designation.