

75 Watt Series CONSTANT VOLTAGE LED DRIVER



www.greenwattpower.com
925-687-4411 / 800-542-3355
email: sales@greenwattpower.com



Description

The GLV75 Watt series provides a constant voltage power supply for use in LED applications. Provides a maximum of 75 watts continuous output with air convection.

- Universal AC Input / Full Range
- 100-277 VAC Input for North America
- High Reliability
- Efficiency up to 86%
- Over Voltage Protection
- Short Circuit Protection
- Over Current Protection
- Over Temperature Protection
- Waterproof IP67
- RoHS Compliant



Model Selection

Model Number	Output Voltage	Rated Current	Efficiency (% Typical)
GLV-24-75	24 V	3.15 A	86

Specifications

Input Parameters			
Input Voltage Range*	MIN	100	VAC
*Designed to optimum performance at 110 and 220 nominal lines	TYP	230	
	MAX	277	
Input Frequency	TYP	47 - 63	Hz
Power Factor 220 VAC Input, Full Load		0.95	
Input Current 110 VAC, Full Load 220 VAC, Full Load	MAX	1.2 0.6	A
Inrush Current 220 VAC/60Hz, Full Load Cold Start	MAX	40	A

Output Parameters			
Voltage Range	TYP	24 ±5%*	V
Noise & Ripple	MAX	360	mV P-P
Setup Time	MAX	3	s
Rise Time	MAX	200	ms
Load Regulation	MAX	2	%

* Tolerance includes Setpoint Tolerance, Line and Load Regulation.

75 Watt Series CONSTANT VOLTAGE LED DRIVER




General Specifications			
Short Circuit Protection		Recovers automatically after fault condition is removed	
Withstand Voltage			
Test Method: I/P - O/P		3750 VAC 1 MIN. \leq 10 mA	
Test Method: I/P - FG		1875 VAC 1 MIN. \leq 10 mA	
Test Method: O/P - FG		500 VAC 1 MIN. \leq 10 mA	
Withstand Impedance Test Method: I/P - O/P		500 VDC 100M Ω /min (at room temperature)	
Grounded Impedance		25A/3 SEC	
MTBF:		\geq 200,000	Hours
INPUT FUSE:			
Temperature - Operating	MIN	-35	$^{\circ}$ C
	TYP	25	
	MAX	70	
Temperature - Storage	MIN	-40	$^{\circ}$ C
	TYP	25	
	MAX	85	
Case Size	8.98" x 2.83" x 1.73" 228mm x 80mm x 45mm		
Unit Weight	0.4Kg		


Notes:

- (1) Specifications are subject to change without notice.
- (2) Output Current will auto-adjust within the current range to provide the constant voltage as specified.
- (3) DC Output Ripple & Noise Test Conditions: Oscilloscope should be limited at 20 MHz bandwidth. At output terminals with parallel 0.1 μ F ceramic and 22 μ F electrolytic capacitors.
- (4) See Green Watt Power website for RoHS statement. www.greenwattpower.com/pdf/rohs.pdf

Derating Curves

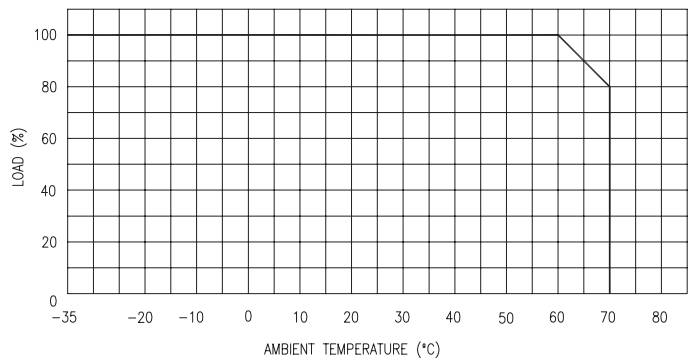

Case Specifications

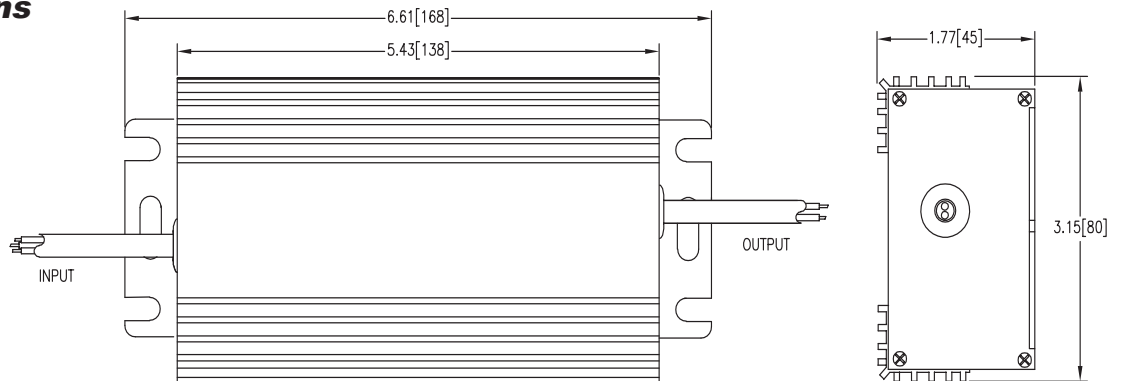

All dimensions are inches (mm)

AC INPUT	DC OUTPUT
AC LINE - BROWN	+V OUT - RED
AC NEUTRAL - BLUE	- V OUT - BLACK
GND - YELLOW/GREEN	

Wire color may vary. See Label for actual designation